


MODEL: PTSD-SERIES

- ProTorc PTSD Hydraulic Square Drive Torque Wrenches are manufactured using high grade aluminium-titanium alloy and high strength alloy steel
- High repeatability can be achieved due to the precise design with an accuracy of +/- 3%
- The 360 x 180 degree uni-swivel hose coupling enables the tool to be used unrestricted in confined areas and eliminates hose kinking
- Torsion resistant housing and torsion free operation
- 360 degree positioning of reaction arm
- Anti-reverse pawl design
- Support handle supplied with models PTSD05 and above
- Comes with convenient carry case
- Two Year Manufacturers Warranty*



		PTSD02	PTSD05	PTSD08	PTSD10	PTSD16	PTSD20	PTSD28	PTSD36	PTSD50	PTSD70
Max. Torque	Nm	1760	4332	7420	10430	15090	19409	26447	34626	47414	69247
	ft/lbs	1299	3197	5476	7697	11137	14324	19518	25554	34992	51105
Min. Torque	Nm	164	433	742	1015	1509	1940	2504	3309	4741	6925
	ft/lbs	121	320	548	749	1114	1432	1848	2442	3499	5111
Sqr. Drive		3/4"	1"	1 1/2"	1 1/2"	1 1/2"	2 1/2"	2 1/2"	2 1/2"	2 1/2"	2 1/2"
L1 (mm)		130	170	202	228	237	273	287	323	351	376
L2 (mm)		102	140	160	184	192	223	248	256	271	295
L3 (mm)		182	249	286	326	336	391	433	464	494	528
H1 (mm)		52	70	81	90	100	110	120	138	153	162
H2 (mm)		77	98	125	134	144	164	187	206	217	226
H3 (mm)		96	127	149	172	181	206	221	258	279	291
H4 (mm)		133	165	184	207	216	241	256	293	315	326
R (mm)		25.8	34.8	39.8	46.8	50.8	56.8	59.8	70.8	76.8	78.8
Weight (kg)		2	4	7	10.6	12.9	20	25	33.8	43	52

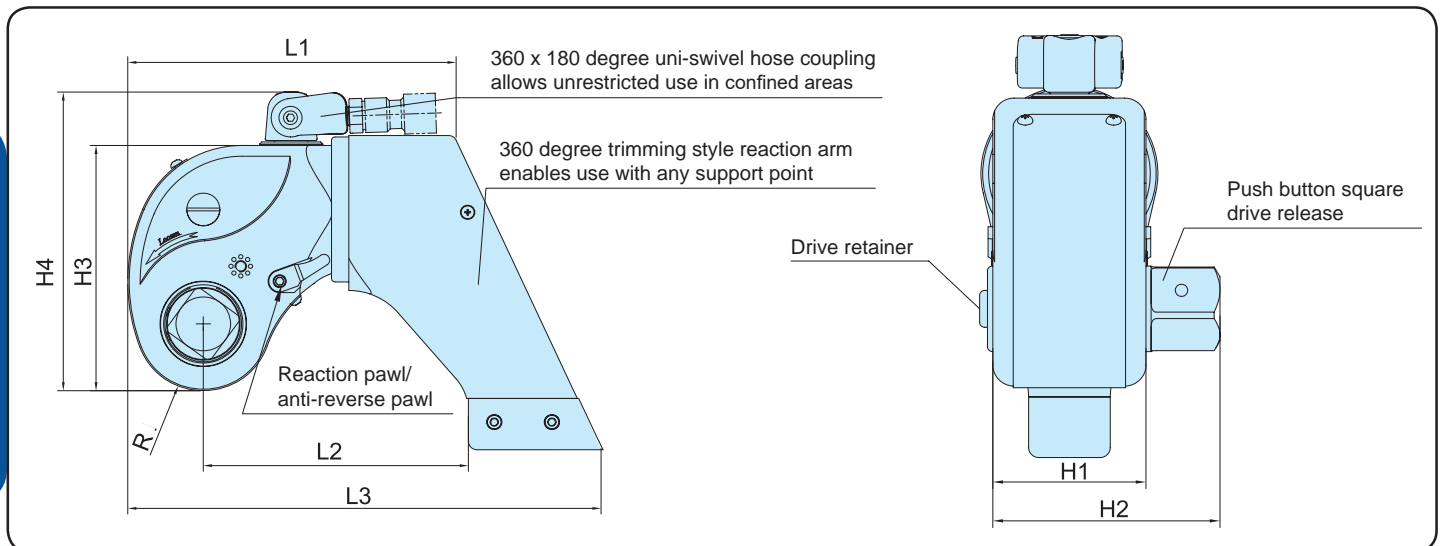

* Conditions apply - contact us for more information