


**MODEL: CL-SERIES**

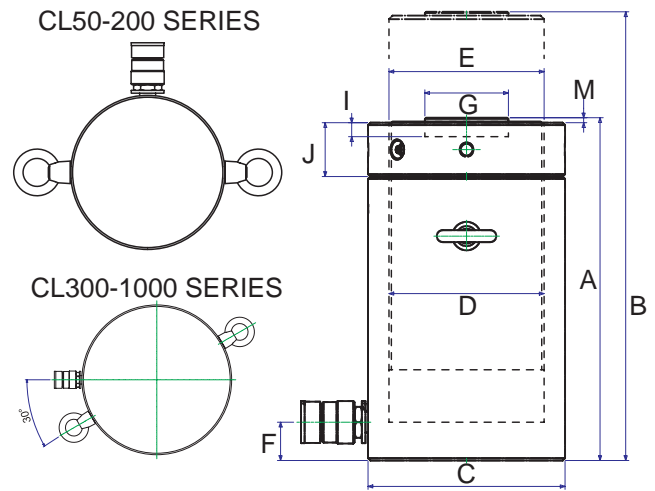
- Single acting
- Capacity : 50 - 1000 Ton
- Stroke : 50mm - 300mm
- Maximum working pressure : 10,000 psi / 700 Bar

**FEATURES**

- Perfect for construction, ship yards, utilities, mining and equipment maintenance
- Optional tilt saddle available for side load protection
- Safety lock nut for mechanical load holding
- Overflow port built in for piston protection

**SPECIFICATIONS**

Model	Cap. Ton	Stroke (mm)	Oil Cap. (cc)	A Retracted Height (mm)	B Extended Height (mm)	Ø C (mm)	Ø D (mm)	Ø E (mm)	F (mm)	Ø G (mm)	H (mm)	Ø I (mm)	J (mm)	K (mm)	Weight (kg)
CL502	50	50	355	164	214	125	95	95x4	20	70	4	13	25	35	15
CL506	50	150	1064	264	414	125	95	95x4	20	70	4	13	25	35	25
CL5010	50	250	1773	364	614	125	95	95x4	20	70	4	13	25	35	35
CL1002	100	50	665	187	237	165	130	130x4	35	70	4	13	25	45	30
CL1006	100	150	1995	287	437	165	130	130x4	35	70	4	13	25	45	48
CL10010	100	250	3325	387	637	165	130	130x4	35	70	4	13	25	45	64
CL1502	150	50	1005	209	259	205	160	160x6	49	125	4	25	25	45	53
CL1506	150	150	3015	309	459	205	160	160x6	49	125	4	25	25	45	78
CL2006	200	150	4035	343	493	235	185	185x6	52	125	4	25	25	50	117
CL20012	200	300	8070	493	793	235	185	185x6	52	125	4	25	25	50	170
CL3006	300	150	6503	395	545	305	235	235x6	62	160	5	25	25	60	233
CL30012	300	300	13005	545	845	305	235	235x6	62	160	5	25	25	60	323
CL4002	400	50	2755	335	385	355	265	265x6	76	160	5	25	25	70	250
CL4006	400	150	8265	435	585	355	265	265x6	76	160	5	25	25	70	327
CL40012	400	300	16530	585	885	355	265	265x6	76	160	5	25	25	70	441
CL5006	500	150	10598	475	625	395	300	300x6	81	180	5	25	25	80	466
CL50012	500	300	21195	625	925	395	300	300x6	81	180	5	25	25	80	617
CL8006	800	150	17910	555	705	505	390	390x6	105	225	5	25	25	100	870
CL80012	800	300	35820	705	1005	505	390	390x6	105	225	5	25	25	100	1110
CL10002	1000	50	7257	495	545	555	430	430x6	108	250	5	25	25	110	949
CL10006	1000	150	21772	595	745	555	430	430x6	108	250	5	25	25	110	1141
CL100012	1000	300	43544	745	1045	555	430	430x6	108	250	5	25	25	110	1430


**OPTIONAL TILT SADDLES**

Model	Cap. Ton	ØL (mm)	M (mm)
TSA-100	50-100	70	22
TSA-200	150-200	125	20
TSA-300	300	195	75
TSA-400	400	225	85
TSA-500	500	250	90
TSA-600	600	275	95
TSA-800	800	320	120
TSA-1000	1000	360	135

