




PH1035





PH2070




PH2220

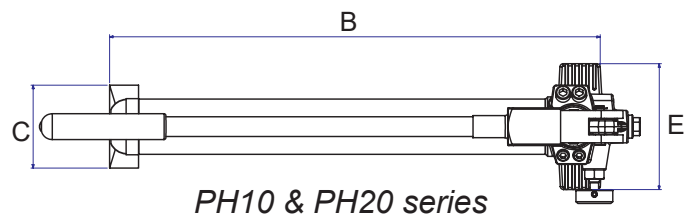

PH10 & PH20 series

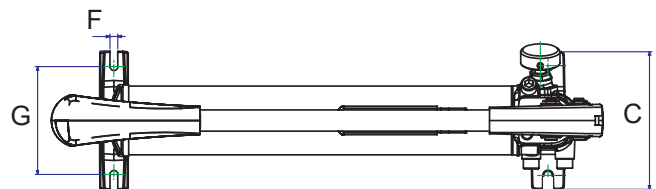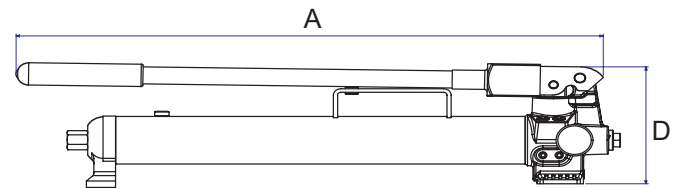

PH2220 series

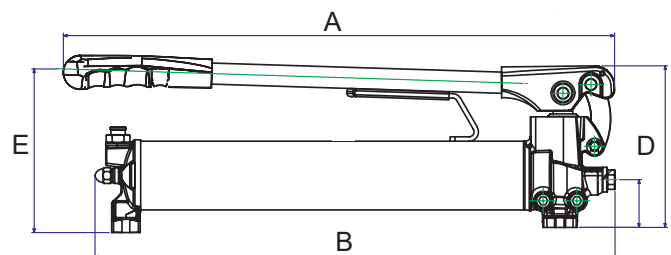

MODEL: PH-SERIES

- Single & Two Speed Options
- Single and Double Acting models
- Maximum working pressure : 10,000 psi / 700 Bar

FEATURES

- Reduced handle effort
- Vent free reservoir to eliminate oil leakage +
- Integrated reservoir over-pressurisation protection ++
- Chrome plated piston with wiper system for long life
- Internal relief valve set at 10,000 psi (700 bar)
- Larger models come with carry handle
- PHD model suitable for double acting cylinders
- Custom pressure setting available

SPECIFICATIONS

Model	Pressure Rating (bar) 1 st Stage / 2 nd Stage	Oil Cap (cc)	Oil Volume per Stroke (cc) 1 st Stage / 2 nd Stage	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Weight (kg)
PH1035 +	- / 700	350	- / 3.2	343	310	90	146	142	-	-	5
PH1070 +	- / 700	700	- / 3.2	633	526	90	146	142	-	-	6.5
PH2035 +	13.8 / 700	350	7 / 1.0	343	310	66	127	142	-	-	5.5
PH2070 +	13.8 / 700	700	13 / 2.8	633	526	90	146	142	-	-	7.3
PH2220 ++	27.5 / 700	2200	39.5 / 2.8	633	578	150	195	208	8	121	13.5
PHD2220 ++	27.5 / 700	2200	35.6 / 2.8	633	609	150	195	208	8	121	15

PHD2220 model is suitable for both single and double acting cylinders.